

Max. Flow Rate: 285 GPH (1,080 LPH)

- Separ 2000 series water separators fuel filters are a simple solution to many different fuel related problems.
- Five separate stages of filtration ensure 99.9% water separation (Certified TUV Report using SAE J1839) at maximum flow.
- Low restriction reduces wear on fuel pumps and ensures full RPMs.
- Backflushable (cleanable) element reduces down time and costly element changes.
- Marine version with U.S. Coast Guard-accepted metal heat deflector.

## INDUSTRIAL



## MARINE



Shown: Industrial (left to right) 2000/18, 2000/18U  
Marine (left to right) 2000/18D-G, 2000/18UD-G

### Inlet / Outlet Connections

Single Unit: 1 1/16-12 Straight o-ring SAE  
Duplex Unit: Shipped with #12 Male JIC Flare  
(other adapters available)  
Inlet and Outlet Pipe connection 22mm.


### Ordering Specifications

SWK-2000/18 U M MK K KD D A - G


Duplex \_\_\_\_\_  
Metal bowl \_\_\_\_\_  
Metal bowl w/ contacts \_\_\_\_\_  
Clear bowl w/ water contacts \_\_\_\_\_  
Clear bowl w/ metal heat deflector  
and water contacts \_\_\_\_\_  
Clear bowl w/ metal heat deflector \_\_\_\_\_  
Automatic switchable duplex \_\_\_\_\_  
(See page 18 for details)  
Gauge \_\_\_\_\_

We reserve the right to alter the specification without prior notice.


### Pressure Drop

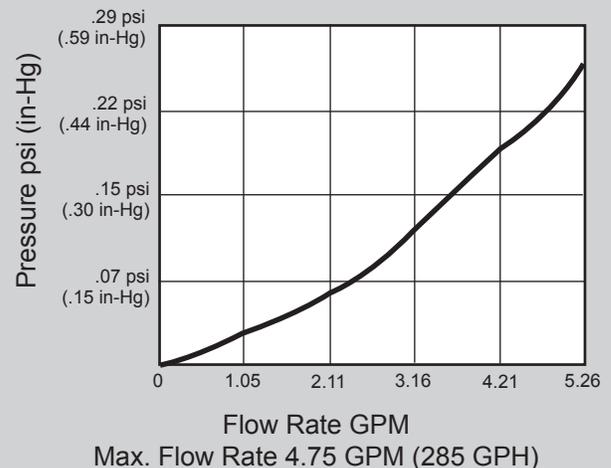

### INDUSTRIAL

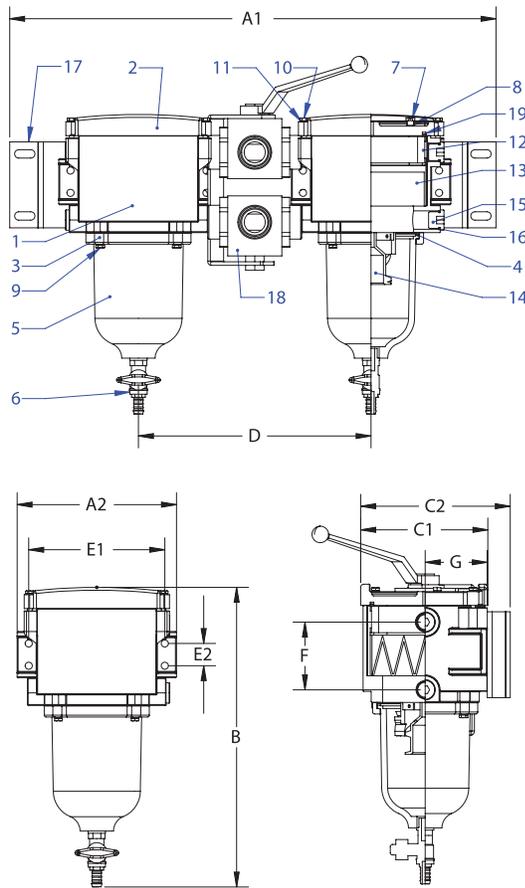

### MARINE

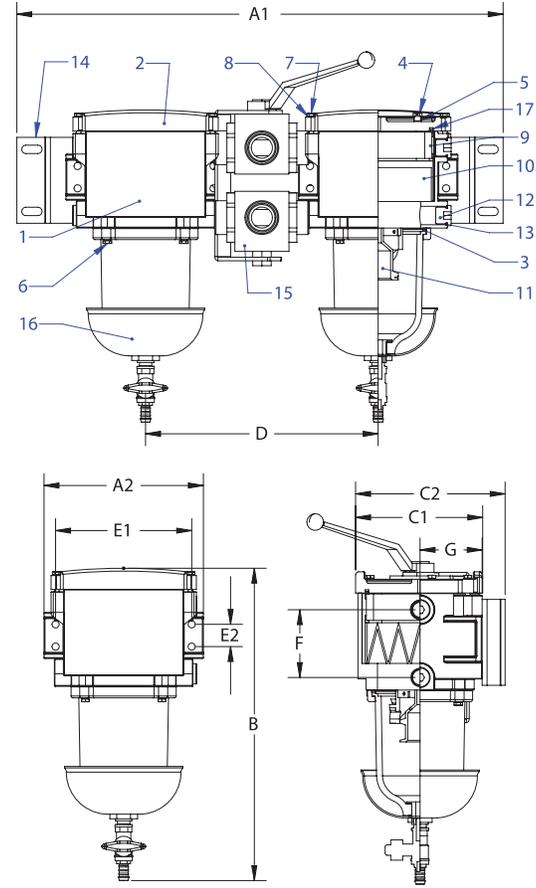

Item	Part #	Description	Dimension	Item	Part #	Description	Dimension
1	30428	Housing	A1	1	30428	Housing	A1
2	30572	Lid		2	30572	Lid	
3	30575	Retaining Ring	A2	3	30423	Bowl Gasket	A2
4	30423	Bowl Gasket		4	30408	Bleed Screw	
5	30986	Bowl	B	5	30558	Bleed Screw Gasket	B
6	30343	Drain Valve		6	30567	Bowl Screw	
7	30408	Bleed Screw	C1	7	30452	Lid Screw	C1
8	30558	Bleed Screw Gasket		8	30448	Washer	
9	30567	Bowl Screw	C2	9	30298	Spring Frame	C2
10	30452	Lid Screw	D	10		Filter Element	D
11	30448	Washer			01810	10 Micron	
12	30298	Spring Frame	E1		01830	30 Micron (standard)	E1
13		Filter Element			01860S	60 Micron (stainless steel)	
	01810	10 Micron	E2	11	30429	Centrifuge	E2
	01830	30 Micron (standard)		12	30705	Plug	
	01860S	60 Micron (stainless steel)	F	13	30721	Plug O-Ring	F
14	30429	Centrifuge		14	30466	Mounting Bracket	G
15	30705	Plug	G	15	30465	Reversing Valve Assembly	
16	30721	Plug O-Ring					
17	30466	Mounting Bracket		16		Bowl Assembly	
18	30465	Reversing Valve Assembly			30990W	Single Unit (white)	
19	30421	Lid Gasket			30990	Duplex Unit (grey)	
					30421	Lid Gasket	
			<b>Model</b>				<b>Model</b>
							<b>Weight</b>
			SWK-2000/18			SWK-2000/18D	11 lbs
							(4.99 kg)
			SWK-2000/18U			SWK-2000/18UD	35.5 lbs
							(16.10kg)